

military tent

M.A.D.-MV3

BASE FABRIC

canvas: PES and TanCate cotton blend (50/50), 420 g/m², water-repellent impregnated (450 mm HH), anti-rot and anti-mold treated
packaging: PE fabric

THREE-LAYER WINDOW

mesh: 100% PES, plasticised, resistant from -30 °C to +70 °C
transparent foil lid: resistant from -22 °C to +66 °C, UV stabilised
canvas lid: base fabric

BOTTOM

the tent is bottomless

FRAME

aluminium, ø 45 × 3 mm
roof cross poles: 8 pcs, 257 cm
longitudinal poles: 9 pcs, 245 cm
standing pole: 8 pcs, 182.5 cm (+ steel legs)

aluminium, steel, ø 45 × 3 mm
diagonal spacers: 4 pcs, 90 cm

FRAME CONNECTORS

steel, ø 38 × 1.5 mm
4-legged connectors: 6 pcs
3-legged connectors: 6 pcs

ACCESSORIES

VK pegs: 51 pcs, 33 cm
synth. ropes + PVC tensioners: 12 pcs, 450 cm, ø 6 mm
steel connecting ropes: 2 sets, 720 cm
hammer: 1 pcs, 800 g
wrenches: 2 pcs, no. 8 in 13
bags (packaging): 7 pcs

DIMENSIONS

width: 565 cm
length: 750 cm
ridge height: 280 cm
side height: 180 cm

WEIGHT

canvases: 42.5 kg
frames: 77.55 kg
accessories: 13.75 kg
bags (packaging): 7.5 kg

FULL TRANSPORT BAGS (VOLUME)

canvases: 2 pcs, 95 × 75 × 25 cm (2 × 0.18 m³)
frames: 2 pcs, 270 × 30 × 20 cm (2 × 0.16 m³)
connectors: 1 pcs, ø 50 × 70 cm (0.14 m³)
accessories: 2 pcs, ø 45 × 55 cm (2 × 0.09 m³)

LIVING AREA

42.4 m²

TOTAL WEIGHT

141.3 kg

ACCOMMODATION FOR

24 persons

NO. OF PARTS

3 pcs




TOTAL LENGTH

750 cm

TENT CODE

302/101

COLOUR CHART

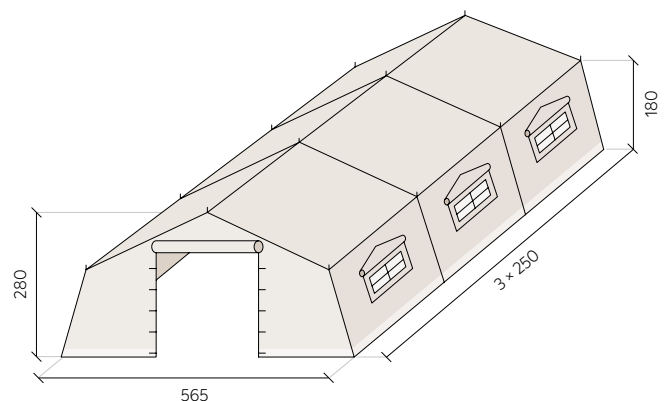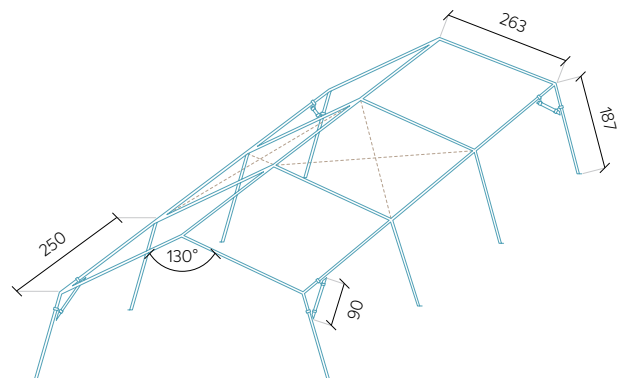

tent characteristics and usage

- The innovative system for providing statics increases the durability and stability of the tent.
- The tent can be exposed to higher loads (snow, wind...).
- A strong frame prolongs the lifespan of the tent (at least 15 years)
- 5-year warranty.
- Standardised in NATO and Slovenian Armed Forces.
- Suitable for wind speeds up to approx. 72 km/h (with additional anchoring for yet higher wind speeds).

M.A.D.-MV3 tent offers living conditions to endangered and affected residents in case of natural and other disasters.

It is extremely suitable for providing housing needs in the event of refugee crises and has also proven to be an option for accommodating members of the staff of Civil protection forces, the military, the police, and members of other protection and rescue forces. The canvases of the model M.A.D.-MV3 can be replaced with canvases of the former model ŠV-M70 without obstacles. The tent consists of **three canvas roofs with sides** (“tent parts”), a front door, and a rear door. The roofs have built-in three-layer windows on both sides, which allow air to pass through and at the same time protect against insects. Transparent foil ensures the brightness of the tent even in rainy weather, while a canvas lid serves to darken the interior. The front door opens to a roll, while the rear door has a curtain entrance with the possibility of installing a removable cabin (additional equipment).











TENT MAINTENANCE AND CLEANING

Brush the canvas parts and, if necessary, wash them with a jet of water. **Use only a softer brush.** Spread out the tent and let it dry. Wash the frame and let it dry. Canvas parts, frame parts, and accessories should be packed and stored exclusively completely dry.

Machine washing, dry-cleaning, bleaching, ironing, or tumble drying of canvases is not allowed. Tears and other damage to the outer canvas should be repaired by the manufacturer.

TECHNICAL DOCUMENTATION

The tent is manufactured in accordance with the Prestandard SIS EN-1999-1-1, Eurocode pt. 9. Technical documentation and static assessment are created in accordance with the first indent of Article 5 of the Mechanical Resistance And Stability of Construction Works (Official Gazette of RS No. 101/2005).

 WATER-REPELLENT fabric	 STRONG fabric	 UV-RESISTANT fabric
 BREATHABLE fabric	 5-YEAR warranty	 DURABLE fabric
 fabric resistant to MOLD AND ROT	 automatic HUMIDITY CONTROL	